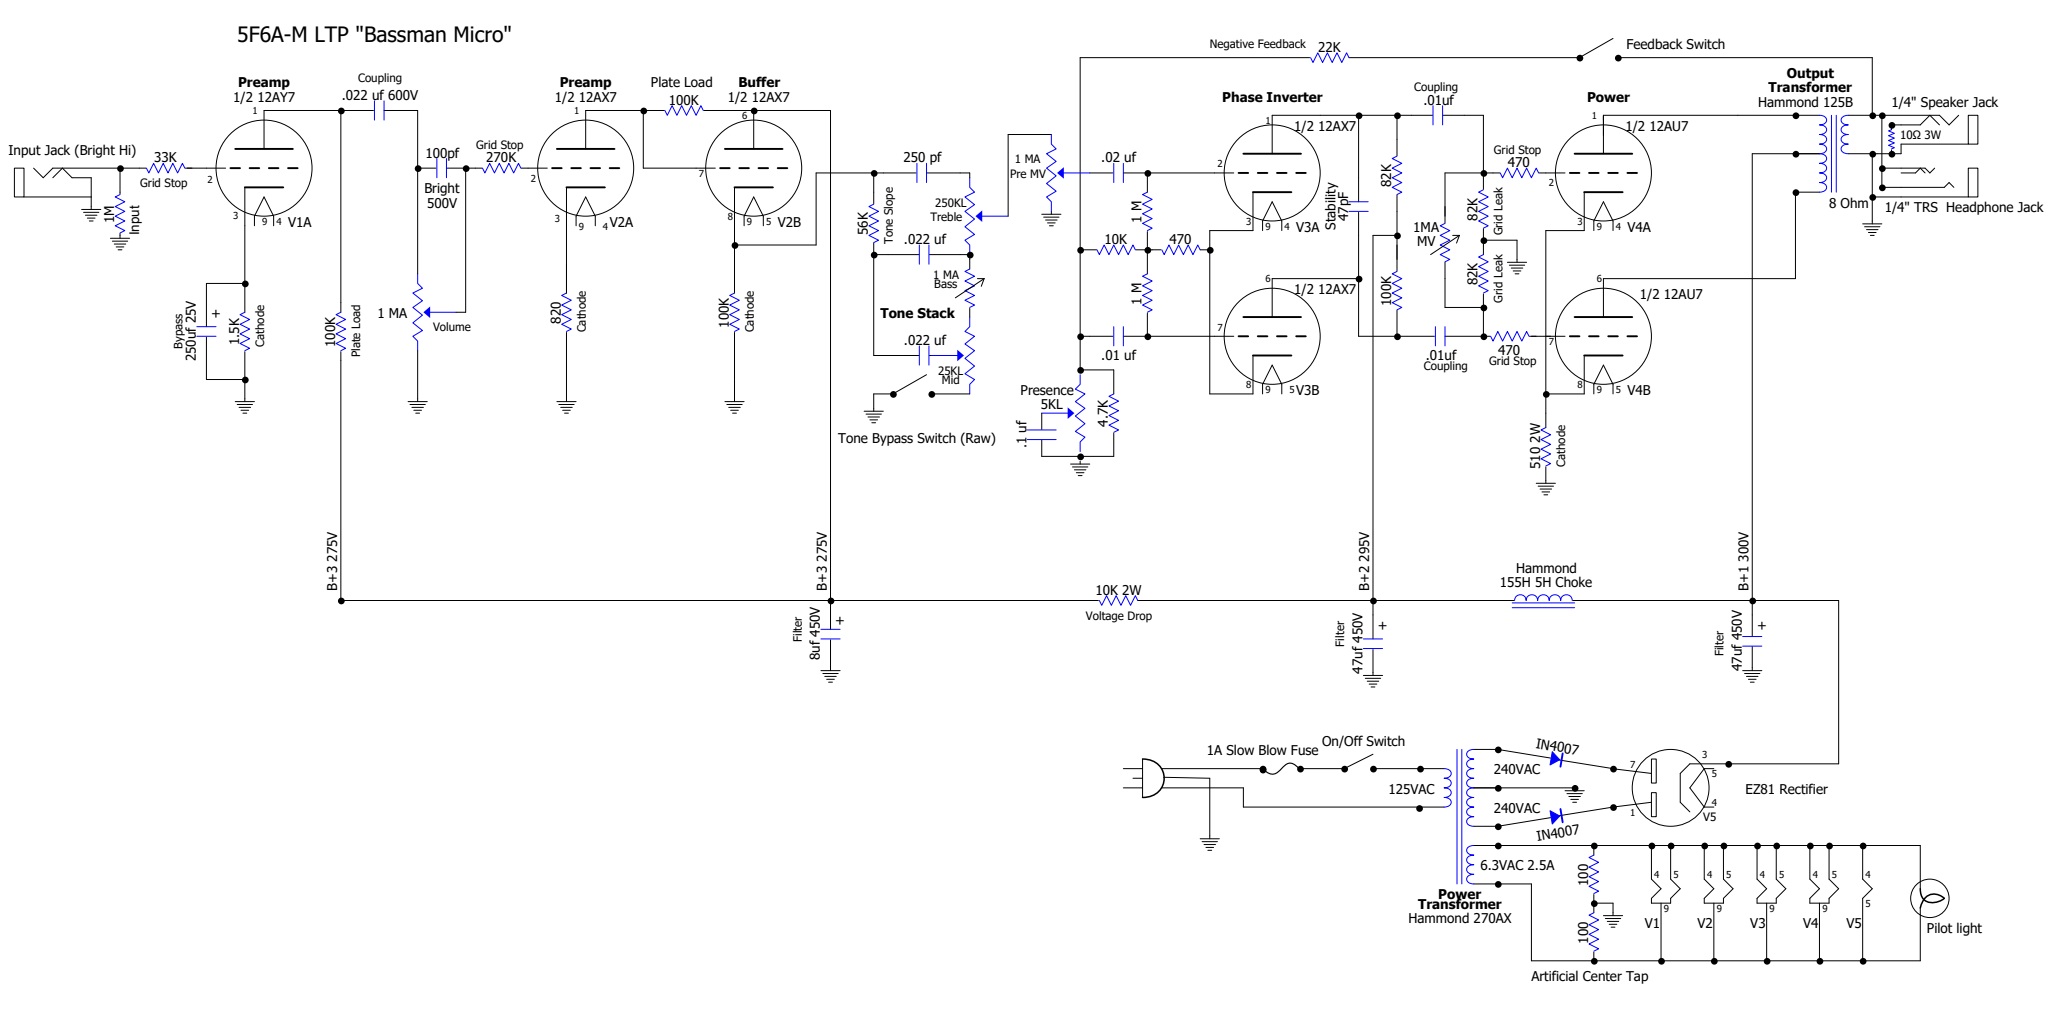
5F6A-M LTP "Bassman Micro"
Input Jack (Bright Hi)
33K
Grid Stop
1M
Input
Preamp
1/2 12AY7
V1A
Bypass
250uf 25V
1.5K
Cathode
Coupling
.022 uf 600V
100K
Plate Load
100pf
Bright
500V
1 MA
Volume
Grid Stop
270K
Preamp
1/2 12AX7
V2A
820
Cathode
Plate Load
100K
Buffer
1/2 12AX7
V2B
100K
Cathode
250 pf
56K
Tone Slope
250KL
Treble
.022 uf
1 MA
Bass
Tone Stack
.022 uf
25KL
Mid
Tone Bypass Switch (Raw)
1 MA
Pre MV
.02 uf
1 M
10K
470
1 M
.01 uf
Presence
5KL
.1 uf
4.7K
Negative Feedback
22K
Feedback Switch
Phase Inverter
1/2 12AX7
V3A
Stability
47pf
1/2 12AX7
V3B
Coupling
.01uf
82K
1MA
MV
100K
.01uf
Coupling
Power
Grid Stop
470
1/2 12AU7
V4A
82K
Grid Leak
82K
Grid Leak
470
Grid Stop
1/2 12AU7
V4B
510 2W
Cathode
Output
Transformer
Hammond 125B
1/4" Speaker Jack
10Ω 3W
8 Ohm
1/4" TRS Headphone Jack
B+3 275V
B+3 275V
B+2 295V
B+1 300V
10K 2W
Voltage Drop
Hammond
155H 5H Choke
Filter
8uf 450V
Filter
47uf 450V
Filter
47uf 450V
1A Slow Blow Fuse
On/Off Switch
125VAC
240VAC
240VAC
IN4007
IN4007
EZ81 Rectifier
V5
6.3VAC 2.5A
Power
Transformer
Hammond 270AX
100
100
V1
V2
V3
V4
V5
Pilot light
Artificial Center Tap