


AB763 DELUXE REVERB "BLACKFACE" AMP

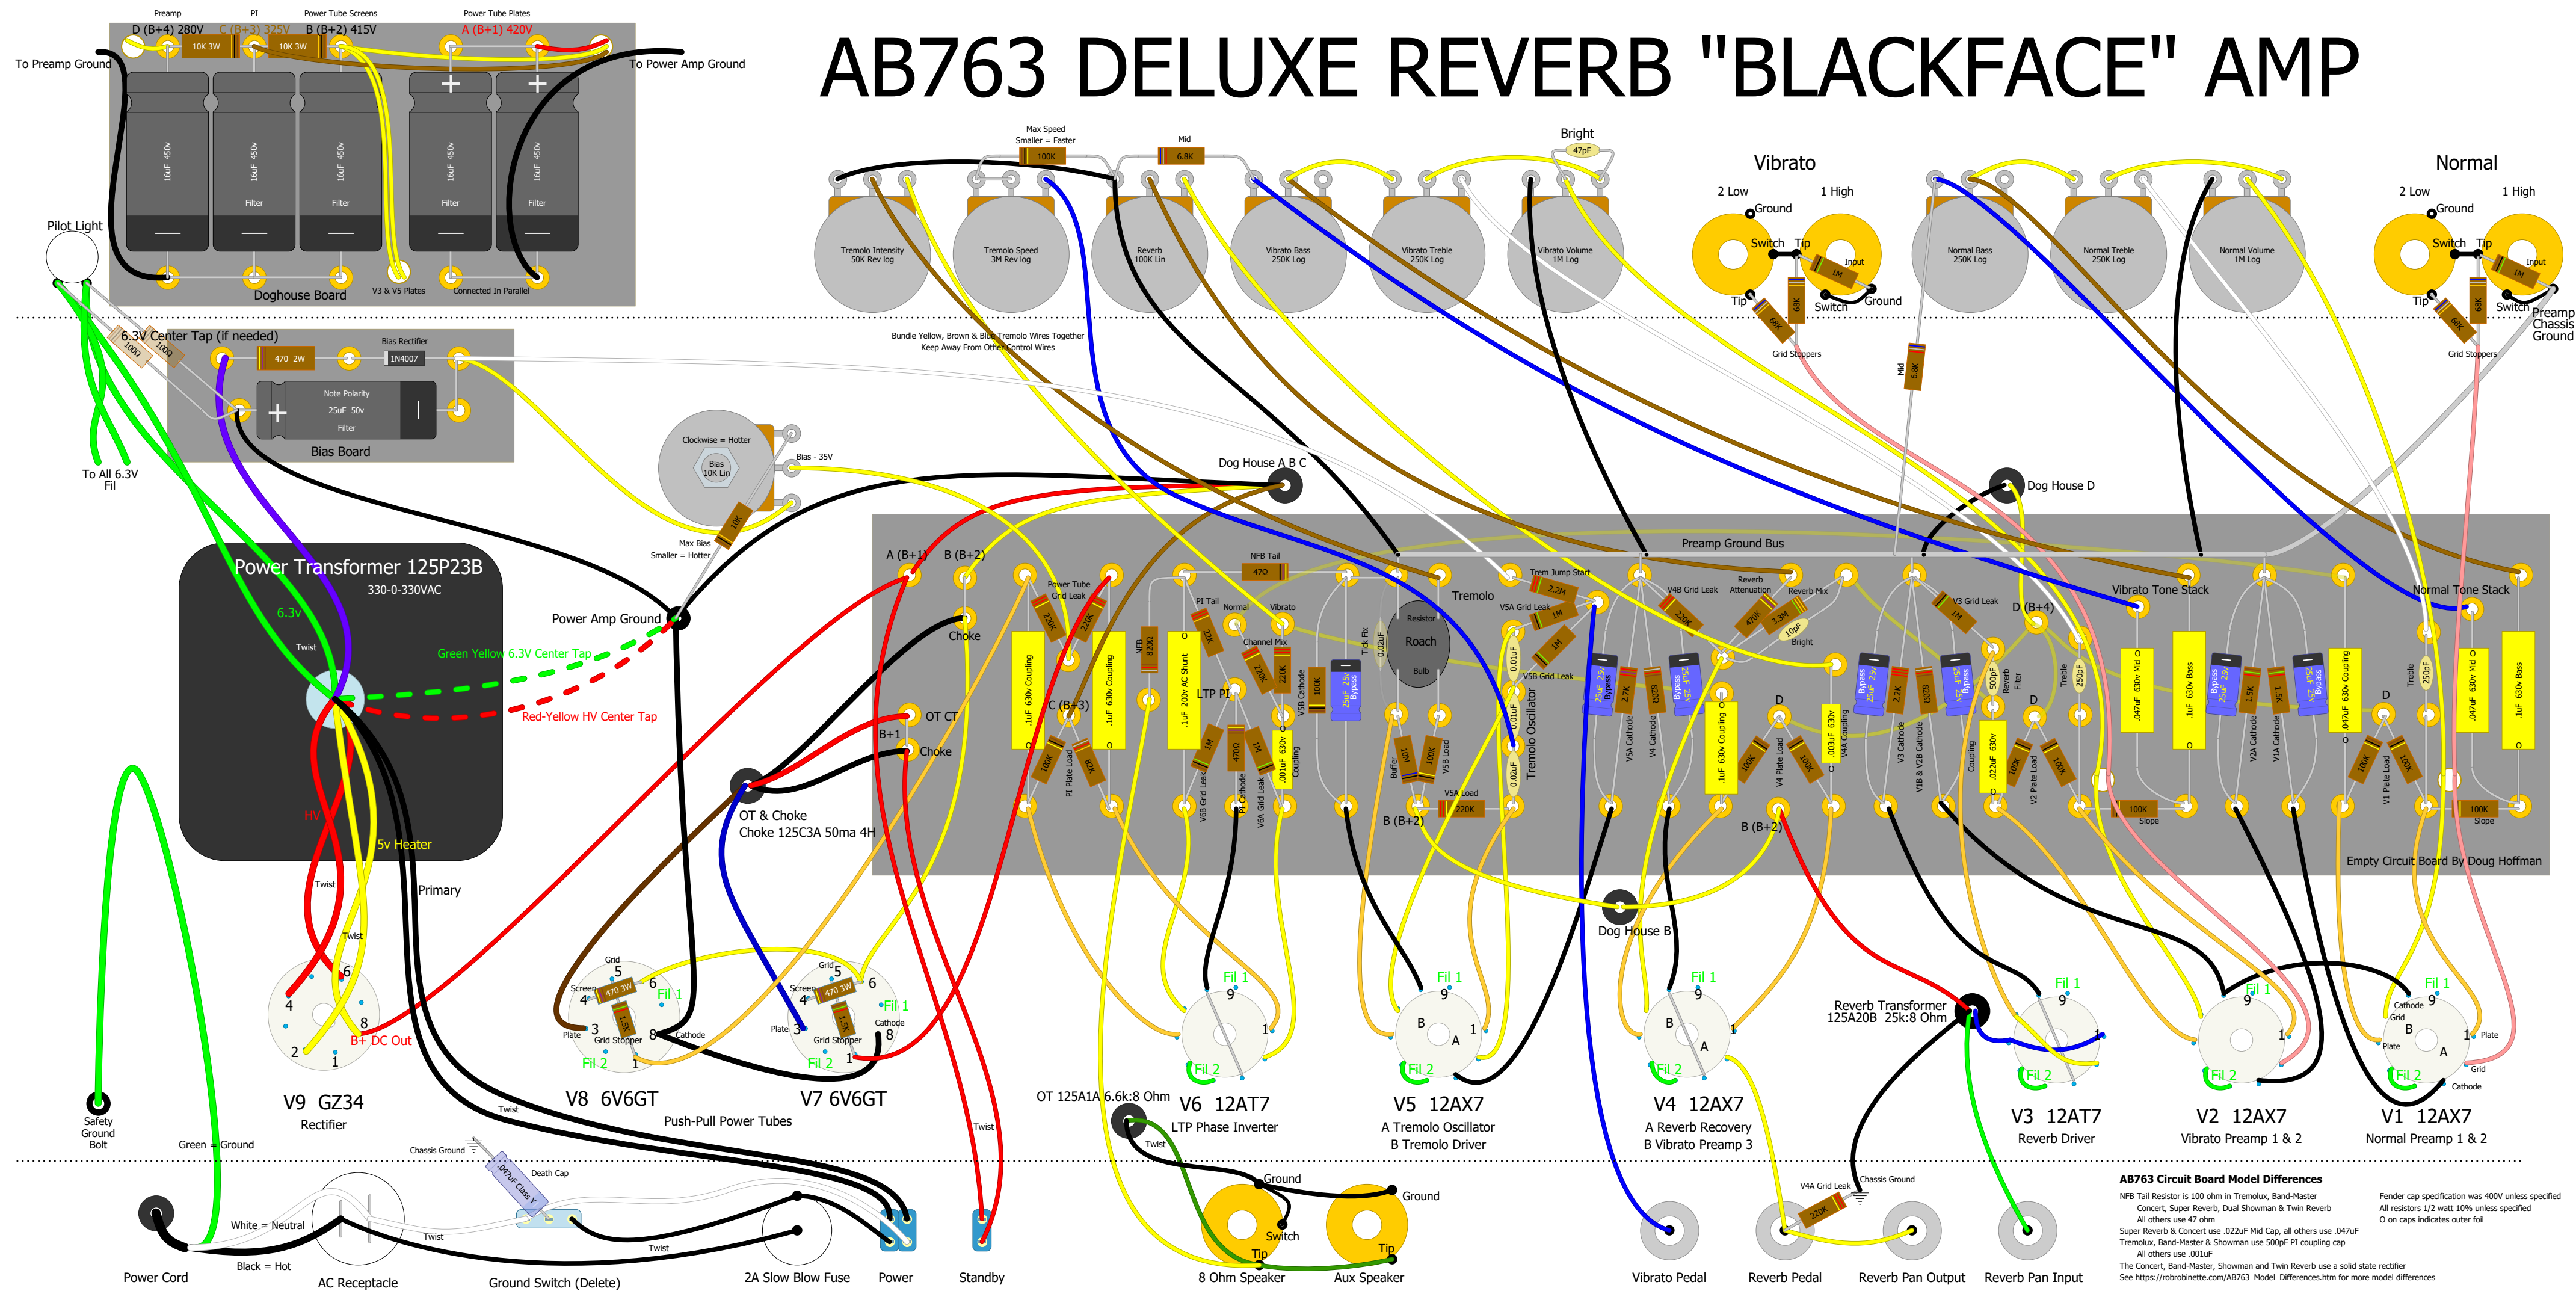

AB763 Circuit Board Model Differences

NFB Tail Resistor is 100 ohm in Tremolux, Band-Master Concert, Super Reverb, Dual Showman & Twin Reverb
 All others use 47 ohm

Super Reverb & Concert use .022uF Mid Cap, all others use .047uF
 Tremolux, Band-Master & Showman use 500pF PI coupling cap
 All others use .001uF

The Concert, Band-Master, Showman and Twin Reverb use a solid state rectifier
 See https://rob-robinette.com/AB763_Model_Differences.htm for more model differences

Fender cap specification was 400V unless specified
 All resistors 1/2 watt 10% unless specified
 O on caps indicates outer foil