


# 1963 AB763 VIBROVERB "BLACKFACE" AMP

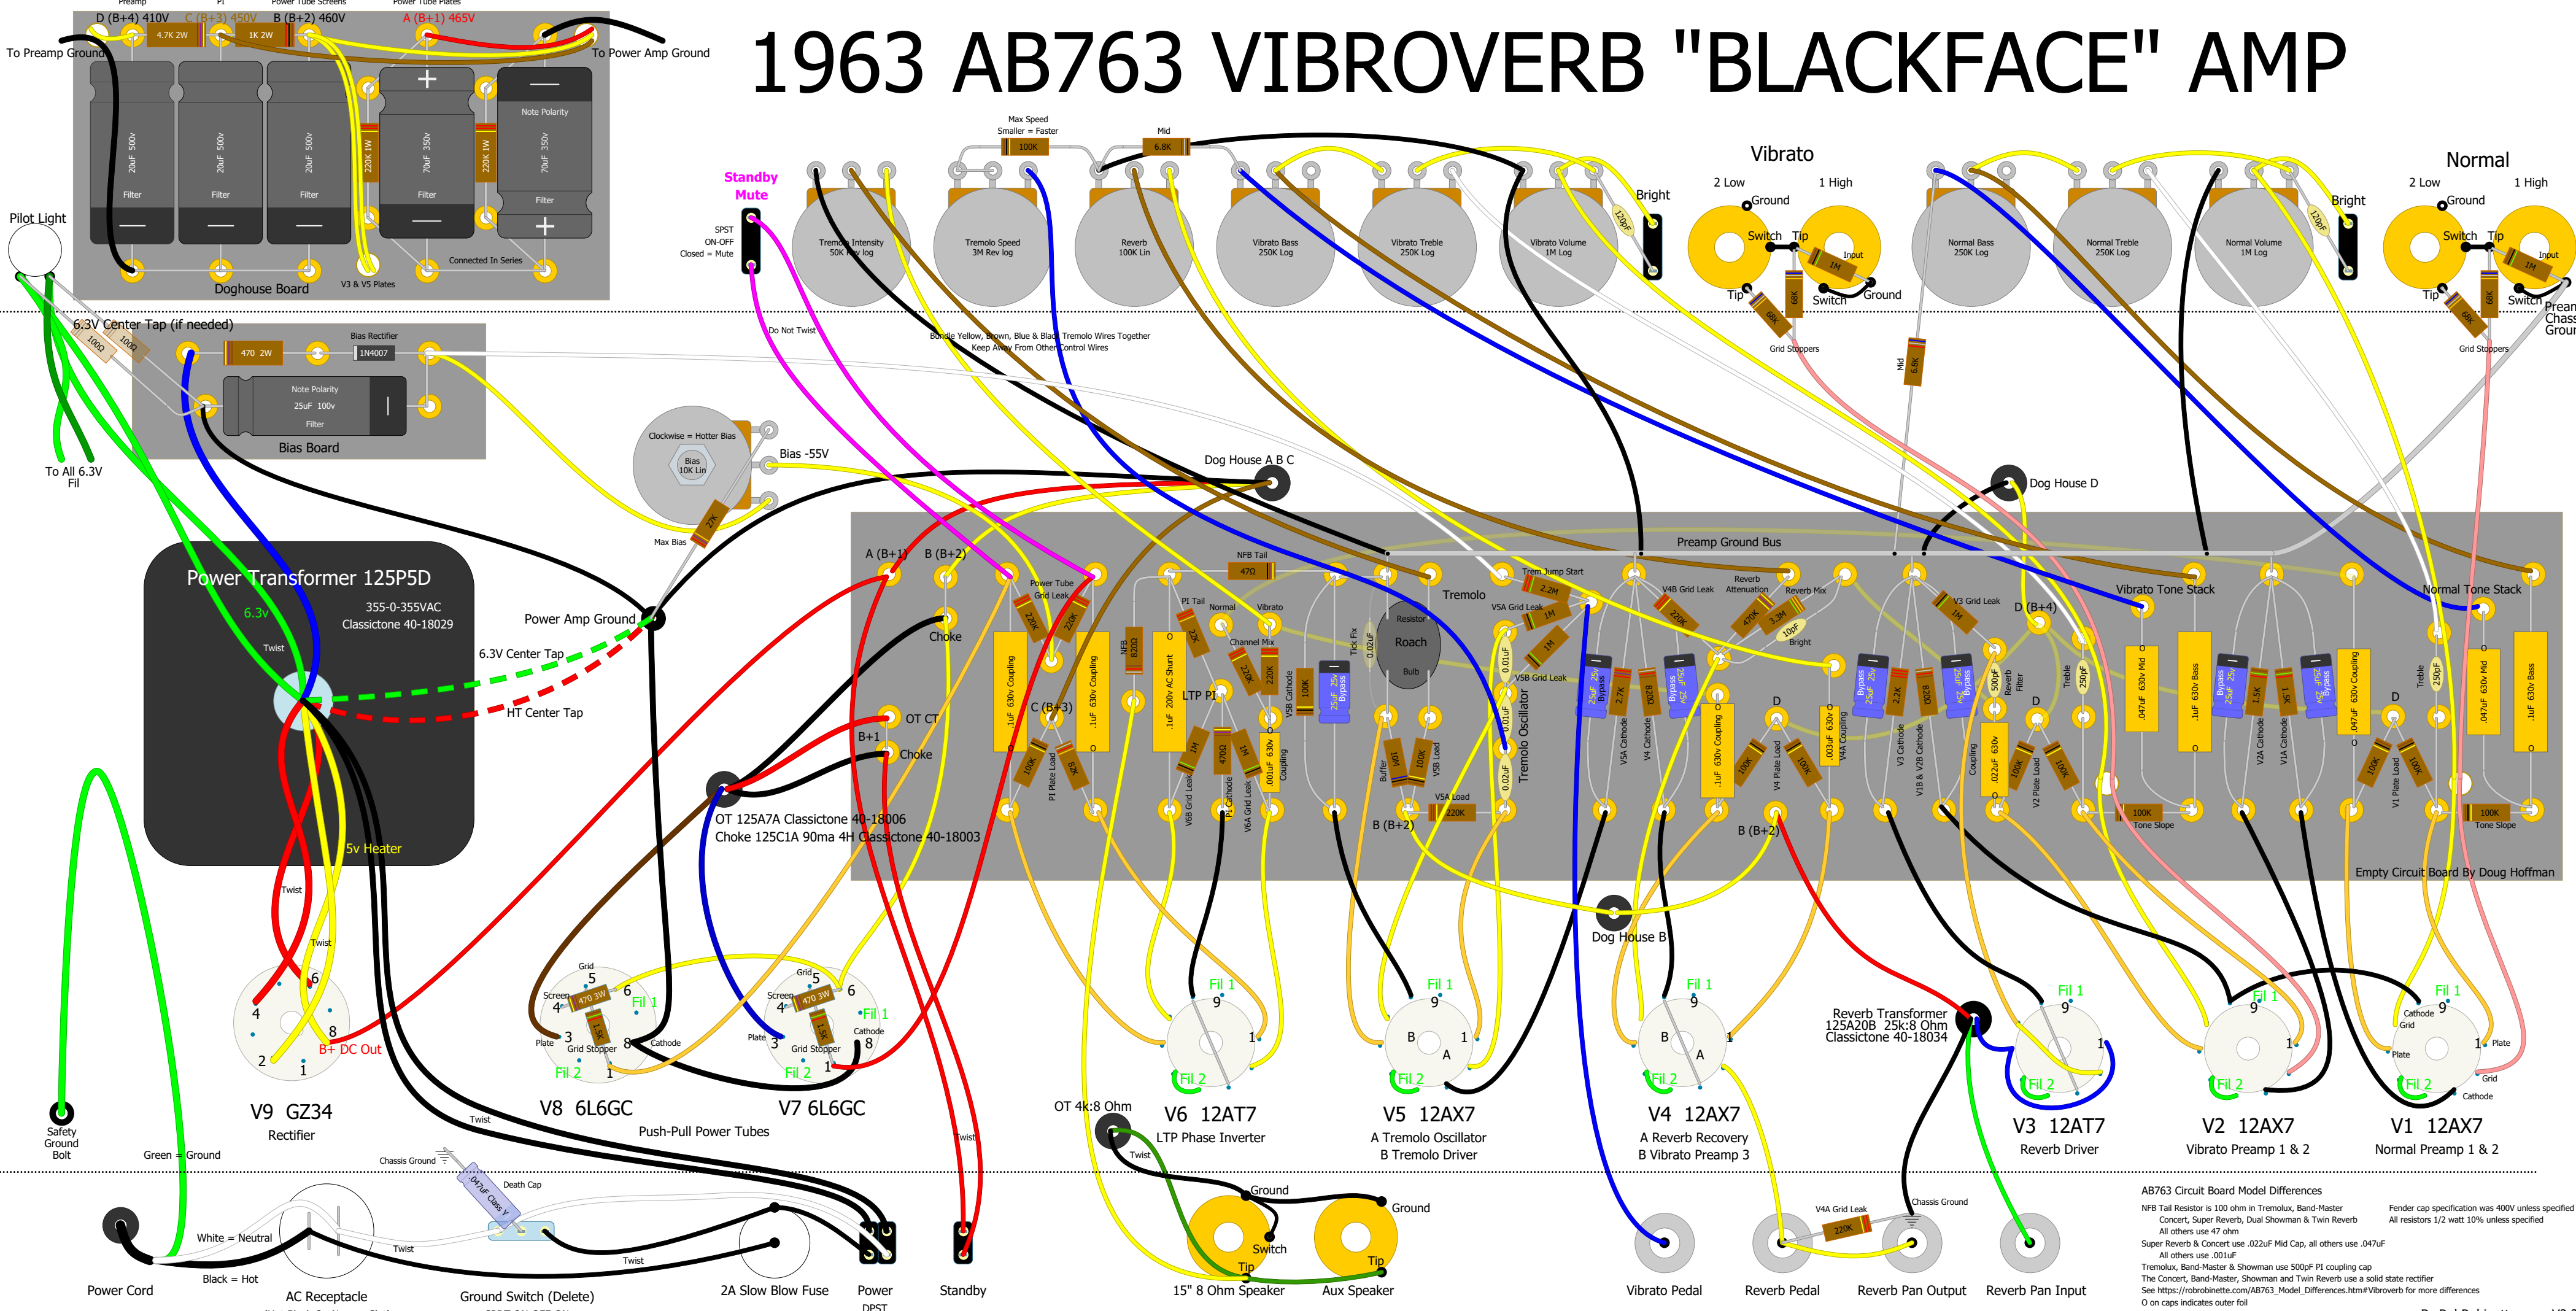

**AB763 Circuit Board Model Differences**  
 NFB Tail Resistor is 100 ohm in Tremolux, Band-Master Concert, Super Reverb, Dual Showman & Twin Reverb All others use 47 ohm  
 Super Reverb & Concert use .022uF Mid Cap, all others use .047uF All others use .001uF  
 Tremolux, Band-Master & Showman use 500pF PI coupling cap  
 The Concert, Band-Master, Showman and Twin Reverb use a solid state rectifier  
 See [https://robinette.com/AB763\\_Model\\_Differences.htm#Vibroverb](https://robinette.com/AB763_Model_Differences.htm#Vibroverb) for more differences  
 O on caps indicates outer foil

Fender cap specification was 400V unless specified  
 All resistors 1/2 watt 10% unless specified

By RobRobinette.com V2.2