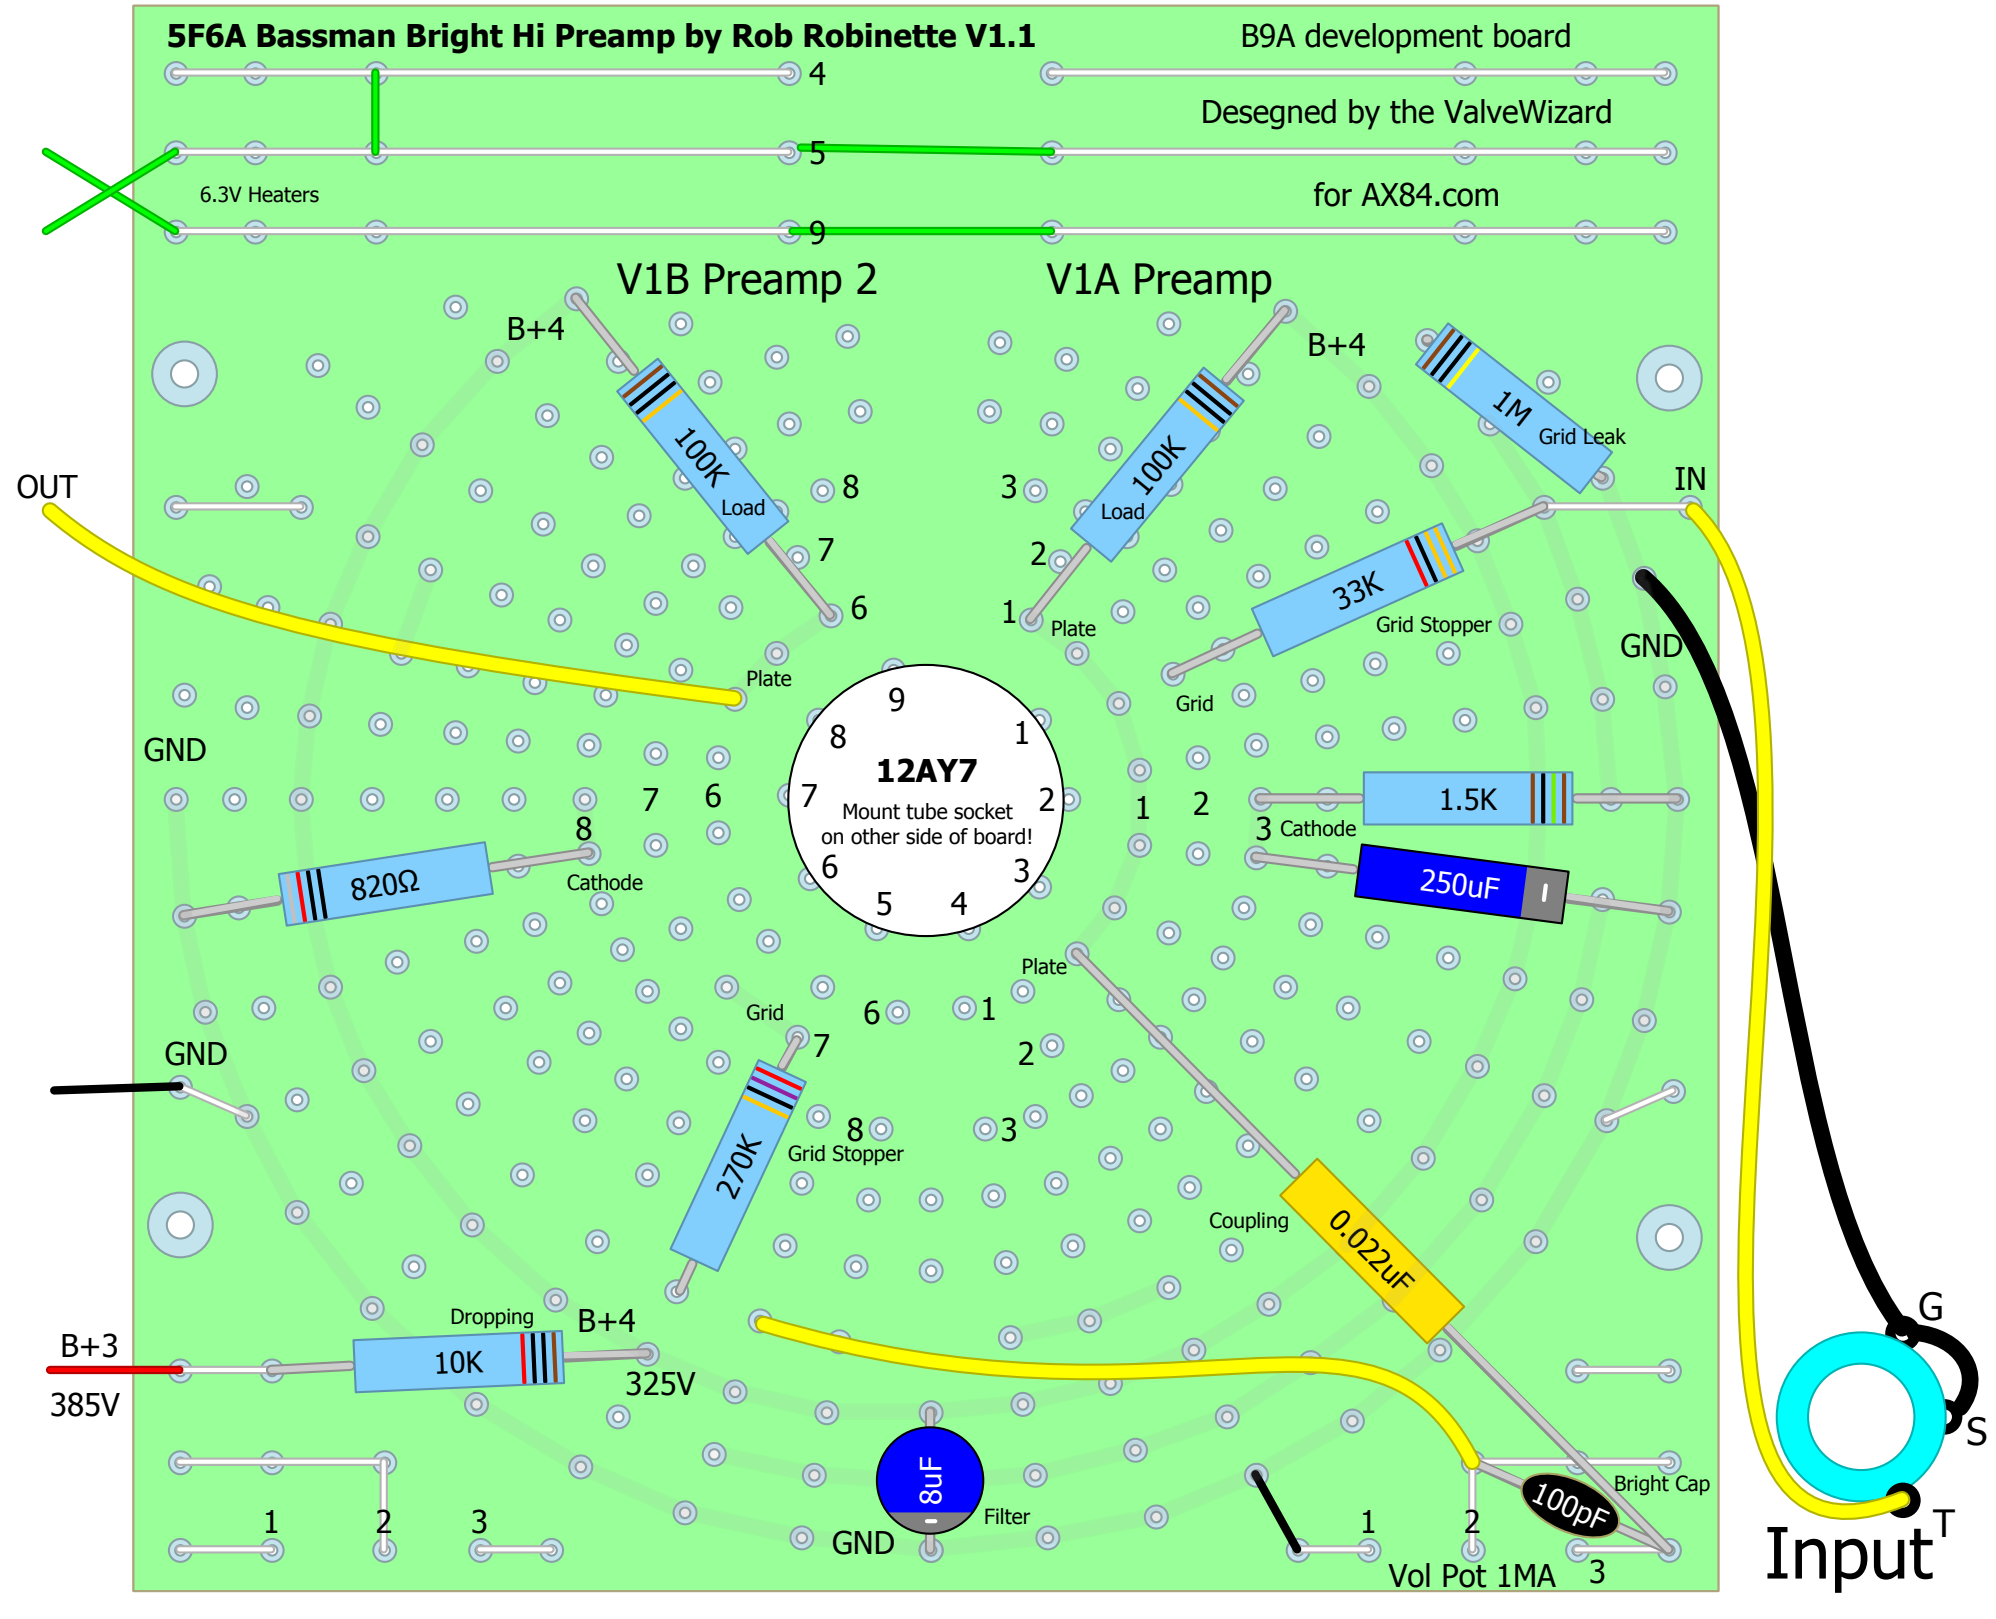
5F6A Bassman Bright Hi Preamp by Rob Robinette V1.1
B9A development board
Desegned by the ValveWizard
for AX84.com
6.3V Heaters
4
5
9
V1B Preamp 2
V1A Preamp
B+4
100K
Load
8
7
6
OUT
Plate
GND
820Ω
Cathode
12AY7
Mount tube socket
on other side of board!
B+4
100K
Load
3
2
1
Plate
1M
Grid Leak
IN
33K
Grid Stopper
Grid
GND
1.5K
Cathode
250uF
Plate
Grid
270K
Grid Stopper
GND
Coupling
0.022uF
B+3
385V
Dropping
10K
B+4
325V
8uF
Filter
GND
100pF
Bright Cap
Vol Pot 1MA
G
S
T
Input